
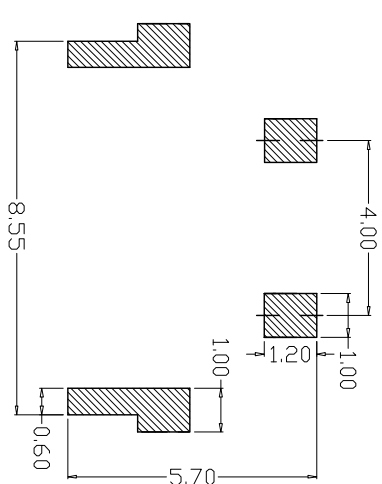
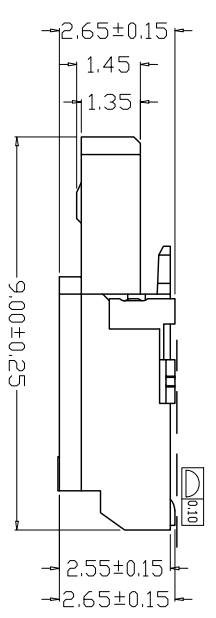
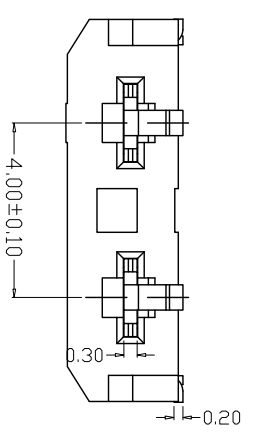
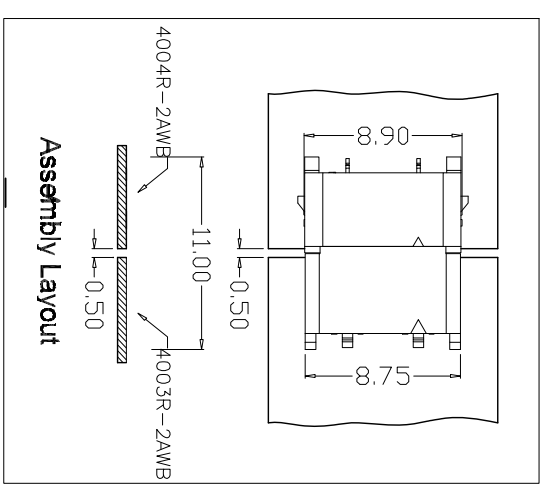
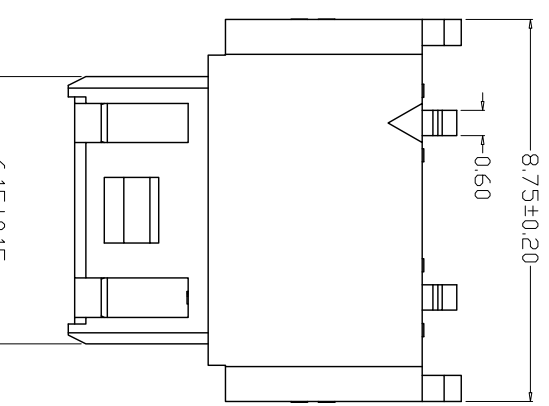


REV	ECN No.	DESCRIPTION	DATE
A		RELEASE	2014-12-10
B		料号变更Y-A	2016-4-10

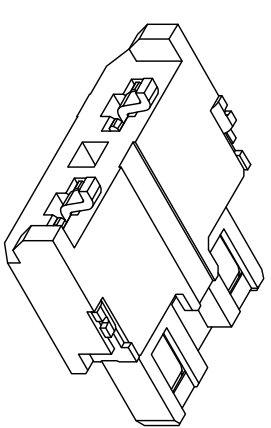

### PCB LAYOUT

- Specifications :**
- Voltage rating: 300V AC/DC
  - Current rating: 3A AC/DC
  - Withstanding voltage: 1700V AC/minute
  - Temperature range: -55°C~+105°C
  - Insulation resistance: ≥1000MΩ
  - Contact resistance: ≤20mΩ
  - After environmental testing: ≤40mΩ

ITEM	COMPONENT	QTY	MATERIAL	FINISH
3	PAD	2 PCS	COPPER ALLOY	Ni:30u"-100u", Sn:80u"-200u"
2	CONTACT	2 PCS	COPPER ALLOY	Ni:30u"-100u", Sn:80u"-200u"
1	HOUSING	1 PCS	THERMOPLASTIC	UL 94V-0, COLOR:NATURE

深圳市德全盛电子科技有限公司		TITLE: ASSEMBLY	
SHENZHEN CITY DEQUANGSHENG ELECTRONIC TECHNOLOGY CO.,LTD.		BTB-CONNECTOR	
USE: CUSTOMER		PART NO.: 4.0B-1-2AWB	
APPD: XINZHONG		DWG NO.: 001	
CHKD: GUILI		SCALE 1:1	
DR: KANGJING		SHEET SHEET	