
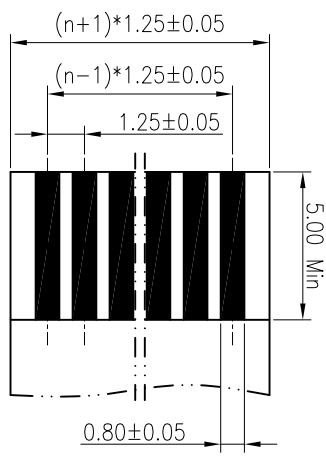
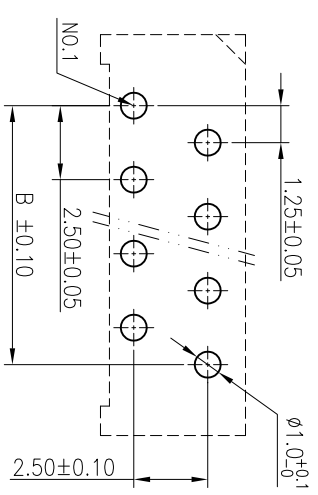
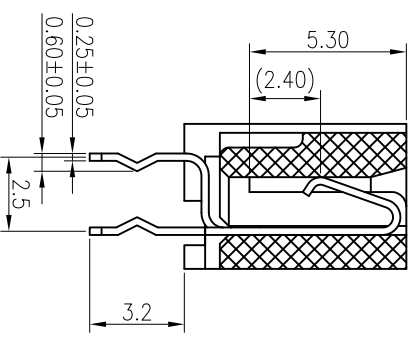
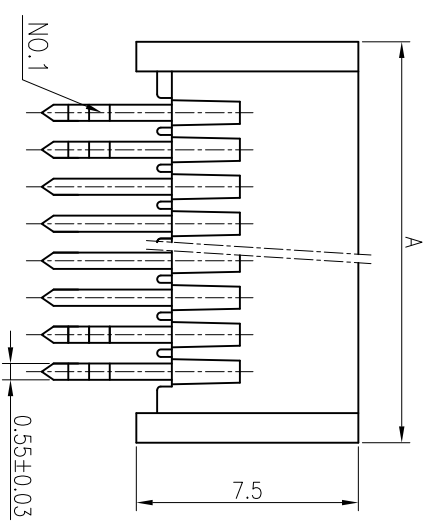


REV	ECN No.	DESCRIPTION	DATE
A		RELEASE	TATE
B		改材质为LCP	2014-6-17

- 备注:
- 电气性能:
 - 2-1. 额定电流: 1.0A
 - 2-2. 额定电压: 200V
 - 2-3. 耐电压: 500V
 - 2-4. 接触电阻: 30mΩ
 - 2-5. 绝缘电阻: 500MΩ
 - 工作温度: -25°C~+85°C
 - 环境管控:
 - 4-1. 禁止使用含有SS-00259所限制的物质。
 - 4-2. 对应第三方测试机构出具的IOP-AES数据和不可测定物质的成分表, 在一年有效期内。

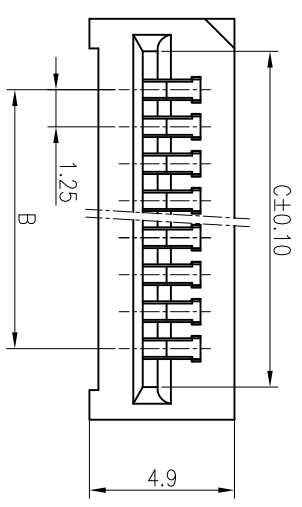

ITEM	COMPONENT	QTY	MATERIAL	FINISH	极数	A	B	C
1	HOUSING	1 PCS	THERMOPLASTIC	UL 94V-0, COLOR:ANTHUR	15	22.30	17.50	20.10
2	CONTACT	n PCS	COPPER ALLOY	Ni:30u"-100u", Sn:80u"-200u"	16	23.55	18.75	21.35
					17	24.80	20.00	22.60
					18	26.05	21.25	23.85
					19	27.30	22.50	25.10
					20	28.55	23.75	26.35
					21	29.80	25.00	27.60
					22	31.05	26.25	28.85
					23	32.30	27.50	30.10
					24	33.55	28.75	31.35
					25	34.80	30.00	32.60
					26	36.05	31.25	33.85
					27	37.30	32.50	35.10
					28	38.55	33.75	36.35
					29	39.80	35.00	37.60
					30	41.05	36.25	38.85
					31	42.30	37.50	40.10
					32	43.55	38.75	41.35
					33	44.80	40.00	42.60
					34	46.05	41.25	43.85
					35	47.30	42.50	45.10
					36	48.55	43.75	46.35
					37	49.80	45.00	47.60
					38	51.05	46.25	48.85
					39	52.30	47.50	50.10
					40	53.55	48.75	51.35

深圳市德全盛电子科技有限公司 SHENZHEN CITY DEQUANGSHENG ELECTRONIC TECHNOLOGY CO.,LTD.				TITLE: ASSEMBLY FPC-CONNECTOR			
USE: CUSTOMER				PART NO.: 1.25-2-NP			
APPD: YAHVEH				DWG NO.: 001			
CHKD: YEWENJY				SCALE 1:1			
DR: CUIRONG				SHEET SHEET			
X±0.5		X±0.5'		X±0.5		X±0.5'	
XX±0.2		XX±0.2'		XX±0.2		XX±0.2'	
UNITS: mm		DR: CUIRONG		SCALE 1:1		SHEET SHEET	