

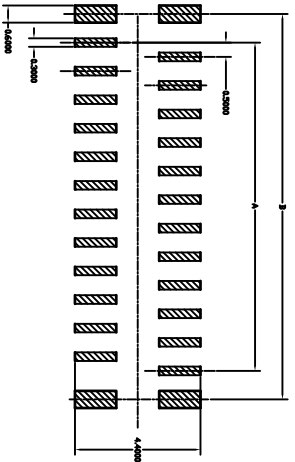
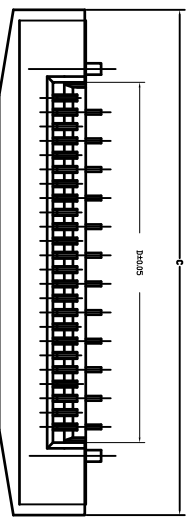



REV	DESCRIPTION	MARK	DATE
A	正式版本		2010/04/10

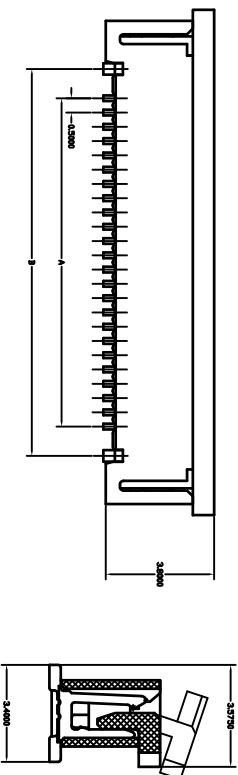

- 备注:
- 电气性能:
 - 1-1. 额定电流: 0.5A
 - 1-2. 额定电压: 50V
 - 1-3. 耐电压: 500V
 - 1-4. 接触电阻: 30mΩ
 - 1-5. 绝缘电阻: 500MΩ
 - 工作温度: -25℃~+85℃
 - 环境管控:
 - 3-1. 禁止使用含有SS-00259所限制的物质。
 - 3-2. 对应第三方测试机构出具的ICP-AES数据和不可测定物质的成分表, 在一年有效期内。

RECOMMENDED PCB Layout
 DEFAULT TOLERANCES:±0.05(TOP VIEW)

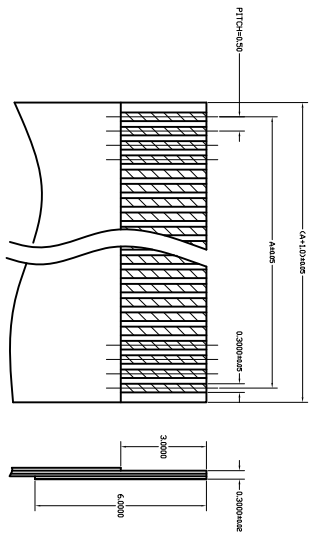

Applicable FPC

孔位	A	B	C	D
12	5.50	7.55	11.20	6.62
24	11.50	13.55	17.20	12.62

4	PAD	2 PCS	PHOSPHER BRONZE	NI 30μ"-100μ", Sn 80μ"-200μ"
3	CONTACT	n PCS	PHOSPHER BRONZE	NI 30μ"-100μ", Sn 80μ"-200μ"
2	COVER	1 PCS	LCP	UL 94V-0, COLOR:NATURE
1	HOUSING	1 PCS	LCP	UL 94V-0, COLOR:NATURE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
深圳市德全盛电子科技有限公司 SHENGZHENG CITY DEQUANGSHENG ELECTRONIC TECHNOLOGY CO.,LTD. TITLE: ASSEMBLY FOR 0.5mm PITCH FPC CONNECTOR PART NO.: 0.5S-4-12PB DWG NO.: 230-1000-124 SCALE 1:1 SHEET 1/1 REV. A DR: CUTRONG				
X. ± 0.30	X° ±	MAT'L	USE:	CUSTOMER
.X ± 0.20	X° ±		APPD:	WENJUV
.XX ± 0.15	XX° ±	FINISH	CHKD:	WENBING
.XXX ±	XXX° ±	UNITS: mm	DR:	CUTRONG