


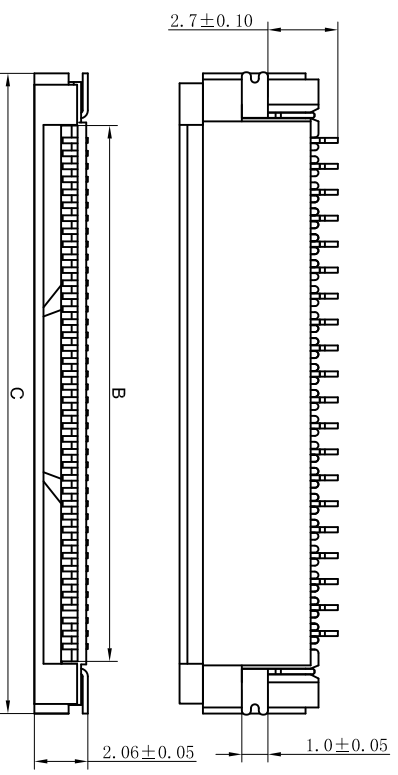


REV	DESCRIPTION	MARK	DATE
A	正式版本		

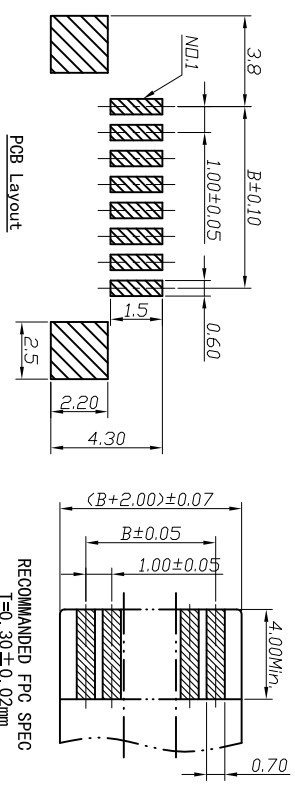

- 备注:
- 电气性能:
 - 1-1. 额定电流: 0.50A AC, DC
 - 1-2. 额定电压: 75V AC/DC
 - 1-3. 耐压: 250V
 - 1-4. 接触电阻: 30mΩ
 - 1-5. 绝缘电阻: 100MΩ
 - 工作温度: -25°C~+85°C
 - 环境管控:
 - 3-1. 禁止使用含有SS-00259所限制的物质。
 - 3-2. 对应第三方测试机构出具的ICP-AES数据和不可测定物质的成分表, 在一年有效期内。

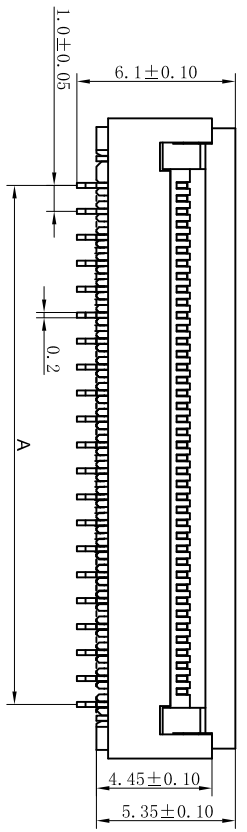

Circuit No.	Dimensions		
	A	B	C
4P	4.00	5.14	9.16
5P	5.00	6.14	10.16
6P	6.00	7.14	11.16
7P	7.00	8.14	12.16
8P	8.00	9.14	13.16
9P	9.00	10.14	14.16
10P	10.00	11.14	15.16
11P	11.00	12.14	16.16
12P	12.00	13.14	17.16
13P	13.00	14.14	18.16
14P	14.00	15.14	19.16
15P	15.00	16.14	20.16
16P	16.00	17.14	21.16
17P	17.00	18.14	22.16
18P	18.00	19.14	23.16
19P	19.00	20.14	24.16
20P	20.00	21.14	25.16
21P	21.00	22.14	26.16
22P	22.00	23.14	27.16
23P	23.00	24.14	28.16
24P	24.00	25.16	29.16
25P	25.00	26.16	30.16
26P	26.00	27.14	31.16
27P	27.00	28.14	32.16
28P	28.00	29.14	33.16
29P	29.00	30.14	34.16
30P	30.00	31.14	35.16

3	PAD	2 PCS	PHOSPHER BRONZE	Ni 30u"~100u", Sn 80u"~200u"
2	CONTACT HOUSING	n PCS	PHOSPHER BRONZE	Ni 30u"~100u", Sn 80u"~200u"
1	COMPONENT	1 PCS	LCP	UL 94V-0, COLOR:NATURE
ITEM		Q'TY	MATERIAL	FINISH
深圳市德全盛电子科技有限公司 SHENGZHEN CITY DEQUANSHENG ELECTRONIC TECHNOLOGY CO., LTD.				
TITLE:		ASSEMBLY FOR FPC CONNECTOR		
PART NO.:		1.0S-2X-nPWB		
USE:		CUSTOMER		
APPD:		yahveh		
CHKD:		yewen.jv		
DR:		cuirong		
SCALE		SHEET		REV.
1:1		1/1		A